



Tuesday, February 3, 2026

**TENDER NUMBER: 632 FOR:**

Rm of Big Arm #251  
 Box 120  
 Imperial, SK S0G 2J0  
 Cell: 306-963-7736  
[rm251@sasktel.net](mailto:rm251@sasktel.net)

**CONTACT:**

Bernard Simard  
 Box 55  
 Rocanville, SK S0A3L0  
 306-435-9876

**CONSTRUCTION:  
 DIMENSIONS:**

Post Frame  
 48' X 100' X 20'

**SPECIFICATIONS FOR 48' X 100' X 20' POST FRAME BUILDING:**

• **EXTERIOR MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (3.5/12 Pitch, 4' O/C)
- 2 x 8 AFAB Columns 4 Ply Eave & Gable Posts (4' O/C)
- 2x 8 AFAB Columns 6 Ply Door Jamb Post
- 2 x 6 Treated Skirt Board
- 2 x 6 Wall Girts (30" O/C) and Roof Purlins (24" O/C)
- Clrd Tuff-Rib 28 ga Steel Siding w/ Clrd 28 ga Steel Trims
- Clrd Tuff-Rib 28 ga Steel Roof w/ Clrd 28 ga Steel Trims
- 2 x 8 Fascia Board & Framing

• **INTERIOR MATERIAL PACKAGE**

- 2 x 6 Treated Skirt Board-(2 x 8 Treated Between each Post
- 2 x 4 Wall Girts (24" O/C)
- R50 Weathershield Attic Insulation
- R28X24 Wall Batts Wall Insulation
- Brite White 28 ga Tuff-Rib Steel Liner Panel On Walls/Ceiling
- Supply & Install Concrete Footing per Post Hole
- Supply & Install Crushed Rock For Fill Around Posts

• **DOORS & WINDOWS**

- Two Overhead Doors 16X18 R-18 w/ Operator & Remote
- Two 3' Insulated Steel Flush Entry Doors w/ Lock Sets
- Four White PVC 3' x 3' Picture Windows

• **24" OVERHANG ON ALL SIDES STEEL SOFFIT**


• **VENTING CLOSURES AT RIDGE CAP**

• **FASTENERS**

- #14 X 1 1/4 Metal To Wood Screw for Steel Wall, Roof Panels
- #10 X 1 1/2 Metal To Wood Screw for Steel Trism & Liner
- 1/2" Bolt Truss to Post Connection

• **ITEM NOT INCLUDED IN THIS TENDER**

Air exchanger  
 Cement floor - heated with drainage  
 Boiler,Electrical in ceiling  
 Utility room, Office space

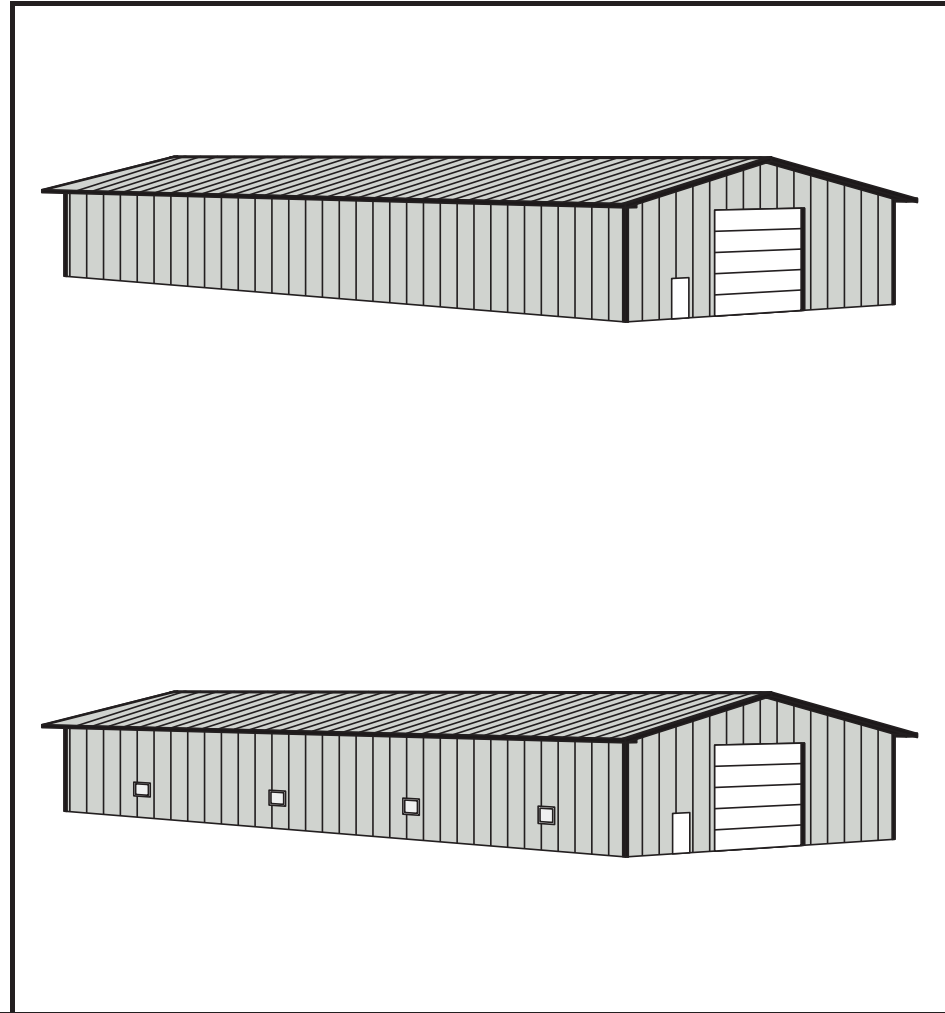

**GRAND TOTAL - INSTALLED**

**\$240,085.03**

Plus GST + PST

**Prices are good for 30 days**